

PP Filter housing with cartridges & bags

TECHNICAL SPECIFICATIONS

Composition	Polypropylene anti-UV treated
Joint	BUNA
Operating pressure	7 bar
Operating temperature	43°C
Connecting diameter	R 2"
Flow rate with bag	1 to 18 m ³ /h
Flow rate with cartridge	1 to 15 m ³ /h
Certifications	FDA, NSF, CE


OPTION

Composite leg stand.

BAG FILTER HOUSING

The bag are fitted with a Polyloc ring to provide perfect sealing and have holding handles to make installation and removal easier.



Available filtration ratings : 1 - 5 - 10 - 25 - 50 et 100 µm.

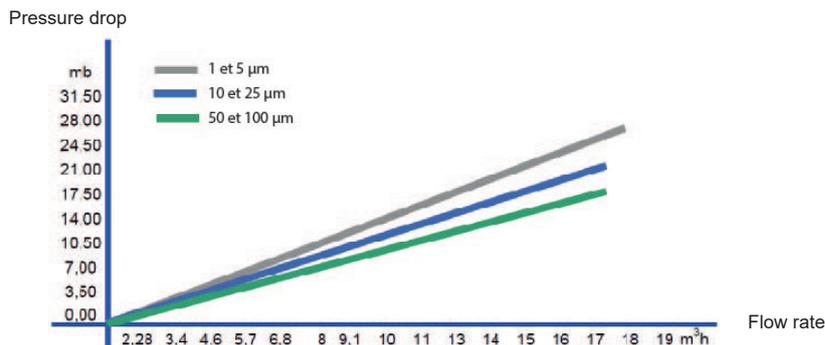

CARTRIDGE FILTER HOUSING

The cartridges have a holding handles to make installation and removal easier.

Available filtration thresholds : 1 - 5 - 10 et 25 µm.

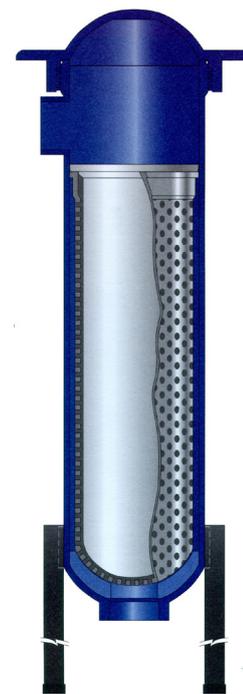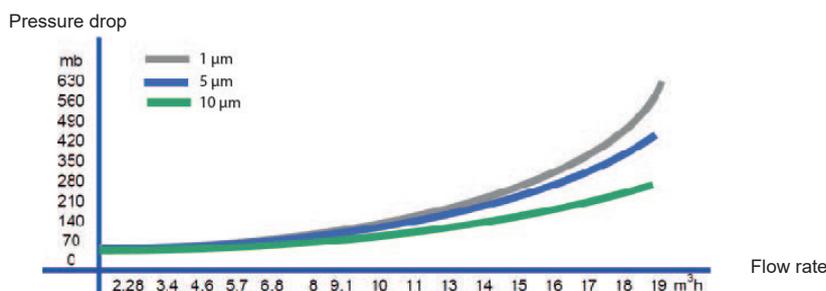

Bag filter housing



Cartridge filter housing



ADH2OC INDUSTRIAL
 Headquarters
 3, Rue Kercoz
 22 220 TRÉGUIER - FRANCE
 Tel +33 (0)2 96 40 02 50
 Fax +33 (0)2 22 44 98 48
 www.adh2oc-industrial.com

Workshop
 12 Rue du Plateau - Lieudit «La Vallée Drouard»
 28500 CHÉRISY - FRANCE
 Tel +33 (0)2 37 50 20 79
 Fax +33 (0)2 22 44 98 48
 e-mail : infos@adh2oc-industrial.com