

WS125

Electronics volumetrics nitrate removal filters
Simplex or alternate duplex
set with 1 ¼" valve mixing



ION EXCHANGE

DENITRATION

ELECTRONICS VOLUMETRICS NITRATE REMOVAL FILTERS

- Simplex or duplex volumetrics nitrate removal filters delivering 7.7 m³/h of denitrated water.
- Electronic controller CI allowing the adjustment of all the operating cycles.
- The regeneration is chronometric or volumetric with or without time regeneration lag, and with or without priority of the time on volume.
- From 100 up to 250 liters of resin.



NITRATE REMOVAL FILTERS DELIVERED WITH

- Electronic volumetric valve WS125 with integrated mixing, fitting 1.25" BSPT, central tubing and strainer.
- Tank(s) in GFR.
- Selective nitrate resin.
- Brine tank(s) with grid and overflow (2 brine tanks for duplex).
- Tubing for drain, brine valve, and overflow.
- For Duplex version : Alternating 3 ways electric valve (with mounting kit up to 16" tanks).
- Optional bypass valve.

APPLICATIONS

- Breeding : denitrated water supply for breeding (sheep, cattle, pigs and poultry farming).
- Drinking water production : Denitrated drinking water production.
- All applications that require water with low nitrate content.

Electronics nitrate removal filters simplex or duplex WS125


TECHNICAL SPECIFICATIONS

Liter of resin	Tank	Brine tank volume	Max. flow rate m ³ /h	Exchange capacity
100	14 x 65	200	4.00	1,5°F to 2,5°F depending on the ratio NO ₃ / (NO ₃ +S ₀₄) in °F and brine rate 125 to 250 g/l
125	16 x 65	350	5.00	
175	18 x 65	500	7.00	
225	21 x 62	500	7.70	

Operating pressure : 2,0 to 8,5 bar

Operating temperature : 4 to 40°C

Connection diameter : 1.25"

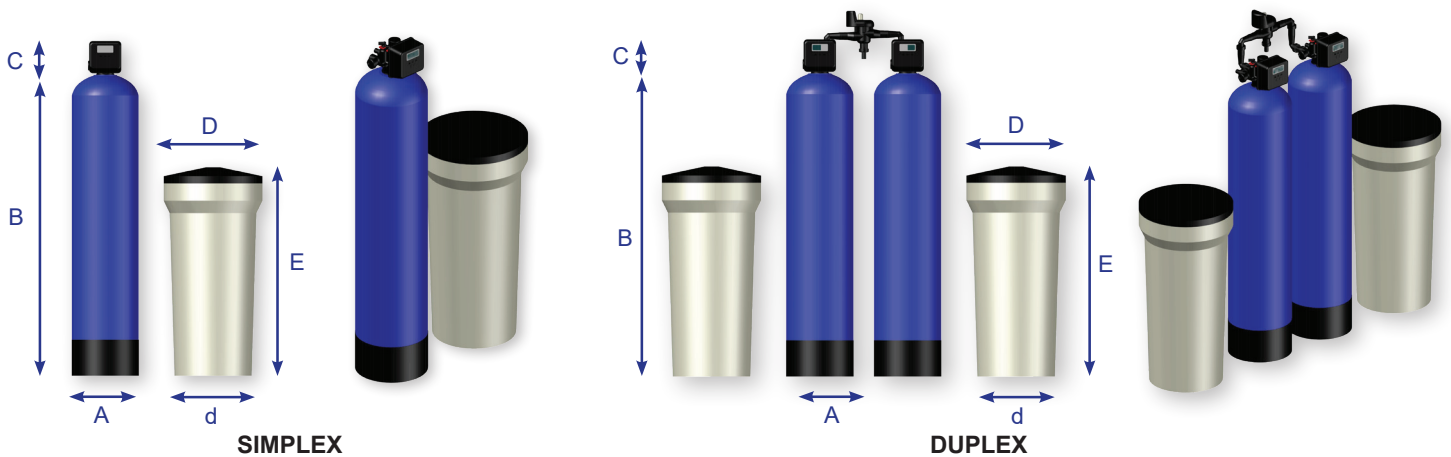

DIMENSIONS								
Tank + Valve				Brine tank				
Liter of resin	Tank	Diam (mm)			Volume (litres)	Diam (mm)		
		A	B	C		d	D	E
100	14 x 65	369	1674	190	200	430	550	1160
125	16 x 65	413	1705	190	350	475	740	1275
175	18 x 65	559	1721	190	500	475	740	1275
225	21 x 62	559	1721	190	500	475	740	1275



ADH2OC INDUSTRIAL
Headquarters
 3, Rue Kercoz
 22 220 TRÉGUIER - FRANCE
 Tel +33 (0)2 96 40 02 50
 Fax +33 (0)2 22 44 98 48
 www.adh2oc-industrial.com

Workshop
 12 Rue du Plateau - Lieudit «La Vallée Drouard»
 28500 CHÉRISY - FRANCE
 Tel +33 (0)2 37 50 20 79
 Fax +33 (0)2 22 44 98 48
 e-mail : infos@adh2oc-industrial.com