


Dosing tanks (translucent)

Commercial and industrial applications



DOSAGE

- Dosing tanks suitable for the safe storage of fluid chemicals.
- The PE tanks produced in the rotation procedure are equipped with a liter and gallon scale.
- On the top end there are thread boxed for the direct installation of most of the ProMinent metering pumps.
- Suction lances and mixers can equally be installed.

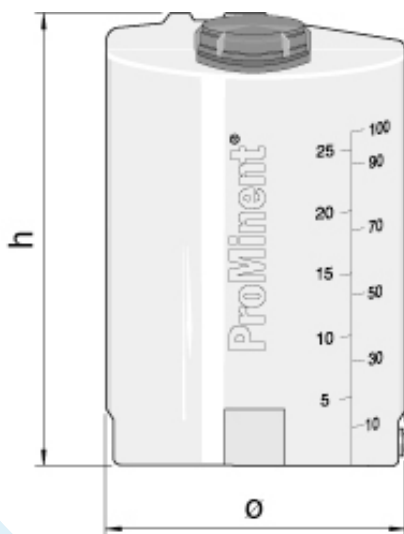

APPLICATIONS

Storage of conditioning chemicals for :

- Steam boilers,
- Cooling water circuits,
- Pretreatment of reverse osmosis,
- Sanitizing products.

Water storage.

Dosing tanks (translucent)

DIMENSIONS

References	Diameter (mm)	Height (mm)	Weight (kg)	Capacity (liters)
TS791993	350	485	3,5	35
TS791994	410	590	5	60
TS1001490	500	760	7	100
TS1023175	600	1100	17,5	250
TS791997	820	1190	24,5	500
TS1010909	1070	1300	48	1000

MATERIAL

- UV stabilized polyethylene.
- Food grade.

TECHNICAL DATA AND OPERATING CONDITIONS

- Robust design in UV stabilized PE (Polyethylene).
- Nominal capacity 35 – 1000 liters.
- Standard colors: nature (black, blue, yellow and red upon order).
- Scale for liters and US gallons.
- Screw cap (plug cap for 35 liter-tank).
- Sintered thread boxes for fixing ProMinent metering pumps.
- Edgewise flattening for fixing the tank.
- Fixing flange with sintered thread boxes for fixing a manual or electric stirrer.

