

Fiberlass bottle

Industrial bottle top





ION EXCHANGE

FIBERGLASS BOTTLE

INDUSTRIAL BOTTLE TOP

- Bottle reinforced with fiberglass and internal PE liner HD.
- Conformity with European Directive 97/23/EC concerning pressurized equipment (PED).
- ACS, NSF (KTW et W270 undergoing) certification.

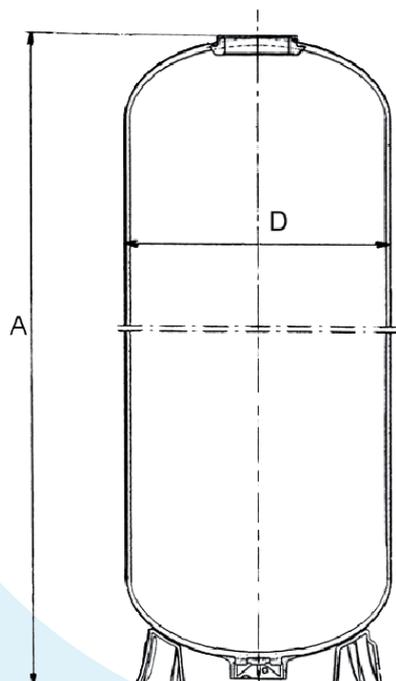

APPLICATIONS

Use for drinking water and industrial treatment systems.

Industrial bottle top

DIMENSIONS

Reference	Type	Outside diameter (mm)	A Height (mm)	Volume (liters)	Top Connection
PT-T4-1465	14" x 65"	369	1674	148.0	4"
PT-T4-1665	16" x 65"	413	1705	188.6	4"
PT-T4-1865	18" x 65"	495	1722	257.0	4"
PT-T4-2162	21" x 62"	559	1721	330.0	4"
PT-T4-2472	24" x 72"	618	1918	494.0	4"
PT-TB4-3072-B*	30" x 72"	780	2140	745.0	4"
PT-TB4-3672-B*	36" x 72"	918	2150	1008.0	4"

* TOP bottle with connection top & bottom and cap 4" on bottom connection and tripod base.

Approximate dimensions, +/- 20 mm for heights and +/- 10 mm for diameters.

TECHNICAL DATA AND OPERATING PARAMETERS

- Maximum operating pressure: 10.5 bar
- Maximum operating temperature: 50°C
- Maximum vacuum pressure : 140 mm Hg
- Connections upper tapped : 4"
- Fatigue testing :250 000 cycles de 0 à 10.5 bar
- Bursting test : 4 times max. operating pressure
- Colour : blue



ADH2OC INDUSTRIAL
Headquarters
5 Rue Kercoz
22 220 TRÉGUIER - FRANCE
Tel +33 (0)2 96 40 02 50
Fax +33 (0)2 22 44 98 48
www.adh2oc-industrial.com

Workshop
12 Rue du Plateau - Lieudit «La Vallée Douard»
28500 CHÉRISY - FRANCE
Tel +33 (0)2 37 50 20 79
Fax +33 (0)2 22 44 98 48
e-mail : infos@adh2oc-industrial.com