

# Fiberglass bottle

Industrial bottle top & bottom





ION EXCHANGE

FIBERGLASS BOTTLE

INDUSTRIAL BOTTLE TOP & BOTTOM

- Bottle reinforced with fiberglass and internal PE liner HD.
- Conformity with European Directive 97/23/EC concerning pressurized equipment (PED).
- ACS, NSF (KTW et W270 undergoing) certification.

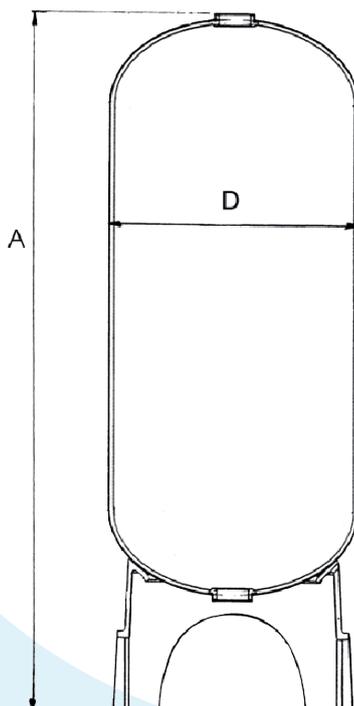

## APPLICATIONS

Use for drinking water and industrial treatment systems.

# Industrial bottle top & bottom

## DIMENSIONS

Référence	Type	Outside diameter (mm)	A Height (mm)	Volume (liters)	Top Bottom Connection
PT-TB4-1665	16" x 65"	413	1861	188.6	4"
PT-TB4-1865	18" x 65"	495	2027	257.0	4"
PT-TB4-2162	21" x 62"	559	2064	330.0	4"
PT-TB4-2472	24" x 72"	618	2168	494.0	4"
PT-TB4-3072	30" x 72"	780	2140	745.0	4"
PT-TB4-3672	36" x 72"	918	2150	1008.0	4"

Approximate dimensions, +/- 20 mm for heights and +/- 10 mm for diameters.

## TECHNICAL DATA AND OPERATING PARAMETERS

- Maximum operating pressure: 10.5 bar
- Maximum operating temperature: 50°C
- Maximum vacuum pressure : 140mm Hg
- Connections upper tapped 4"
- Fatigue testing : 250 000 cycles de 0 à 10.5bar
- Bursting test : 4 times max. operating pressure
- Colour : blue



ADH2OC INDUSTRIAL  
Headquarters  
5 Rue Kercoz  
22 220 TRÉGUIER - FRANCE  
Tel +33 (0)2 96 40 02 50  
Fax +33 (0)2 22 44 98 48  
www.adh2oc-industrial.com

Workshop  
12 Rue du Plateau - Lieudit «La Vallée Douard»  
28500 CHÉRISY - FRANCE  
Tel +33 (0)2 37 50 20 79  
Fax +33 (0)2 22 44 98 48  
e-mail : infos@adh2oc-industrial.com