

Fiberglass bottle

Semi-industrial bottle top




ION EXCHANGE

FIBERGLASS BOTTLE

SEMI-INDUSTRIAL BOTTLE TOP

- Bottle reinforced with fiberglass and internal PE liner HD.
- Conformity with European Directive 97/23/EC concerning pressure equipment (PED).
- ACS, NSF (KTW et W270 undergoing) certification

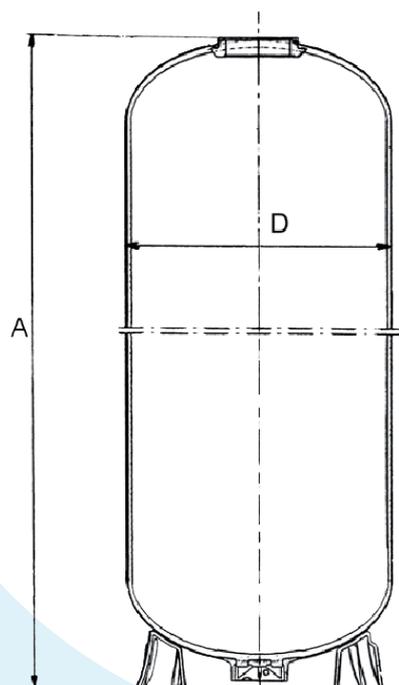

APPLICATIONS

Use for drinking water and industrial treatment systems.

Semi-industrial bottle top

DIMENSIONS

Reference	Type	Outside diameter (mm)	A Height (mm)	Volume (liters)	Top Connection
PT-T2.5-0713	7" x 13"	182	335	6,3	2.5"
PT-T2.5-0735	7" x 35"	182	896	19,1	2.5"
PT-T2.5-0817	8" x 17"	207	437	10,5	2.5"
PT-T2.5-0835	8" x 35"	207	897	23,6	2.5"
PT-T2.5-0935	9" x 35"	233	898	31,6	2.5"
PT-T2.5-1017	10" x 17"	259	434	16,5	2.5"
PT-T2.5-1035	10" x 35"	259	893	38,3	2.5"
PT-T2.5-1054	10" x 54"	259	1381	61,0	2.5"
PT-T2.5-1252	12" x 52"	307	1338	84,7	2.5"
PT-T2.5-1354	13" x 54"	335	1398	105,7	4"

TECHNICAL DATA AND OPERATING PARAMETERS

- Maximum operating pressure: 10.5bar
- Maximum operating temperature: 50°C
- Maximum vacuum pressure : 140mm Hg
- Connections upper tapped : 2"1/2 or 4"
- Fatigue testing : 250 000 cycles de 0 à 10.5bar
- Bursting test : 4 times max. operating pressure
- Colour : blue



ADH2OC INDUSTRIAL
Headquarters
5 Rue Kercoz
22 220 TRÉGUIER - FRANCE
Tel +33 (0)2 96 40 02 50
Fax +33 (0)2 22 44 98 48
www.adh2oc-industrial.com

Workshop
12 Rue du Plateau - Lieudit «La Vallée Douard»
28500 CHÉRISY - FRANCE
Tel +33 (0)2 37 50 20 79
Fax +33 (0)2 22 44 98 48
e-mail : infos@adh2oc-industrial.com