

# Polyéthylène tank

Cylindrical tank

Food contact - blue or grey



## STOCKAGE

### POLYETHYLENE TANK

- Rotary moulded tanks of polyéthylène designed for food contact.
- Tanks provided with screw man hole, graduation and PVC rod with high level floats and low level floats, both adjustable.



*A 300 to 12 500L range (also available in anthracite in request)*

## APPLICATIONS

Atmospheric water storage.


# Polypropylene tank

## TECHNICAL CHARACTERISTICS

Reference	Volume	Weight (kg)	D x H (mm)	Basic facilities
CV300	300 L	13.5	D.630x1170	Man hole (ø 300 mm) Low output 1,5" - 2 levels
CV500	500 L	20.5	D.700x1460	Man hole (ø 300 mm) Low output 1,5" - 2 levels
CV750	750 L	25.5	D.800x1680	Man hole (ø 300 mm) Low output 1,5" - 2 levels
CV1000	1000 L	32.5	D.800x2180	Man hole (ø 300 mm) Low output 1,5" - 2 levels
CV1500	1500 L	43	D.1060x1920	Man hole (ø 300 mm) Low output 2" - 2 levels
CV2000	2000 L	48	D.1200x2015	Man hole (ø 400 mm) Low output 2" - 2 levels
CV3000	3000 L	80	D.1700x1750	Man hole (ø 400 mm) Low output 2" - 2 levels
CV5000	5000 L	130	D.1900x2100	Man hole (ø 400 mm) Low output DN80 - 2 levels
CV7500	7500 L	170	D.2150x2400	Man hole (ø 400 mm) Low output DN80 - 2 levels
CV10000	10000 L	220	D.2400x2600	Man hole (ø 550 mm) Low output DN100 - 2 levels
CV12500	12500 L	265	D.2400x3100	Man hole (ø 550 mm) Low output DN100 - 2 levels

## RECOMMENDED USE

- Atmospheric pressure.
- Temperature  $\leq 40^{\circ}\text{C}$
- Before the installation, make sure that the concrete ground surface is flat and smooth in order to avoid perforating the tanks.

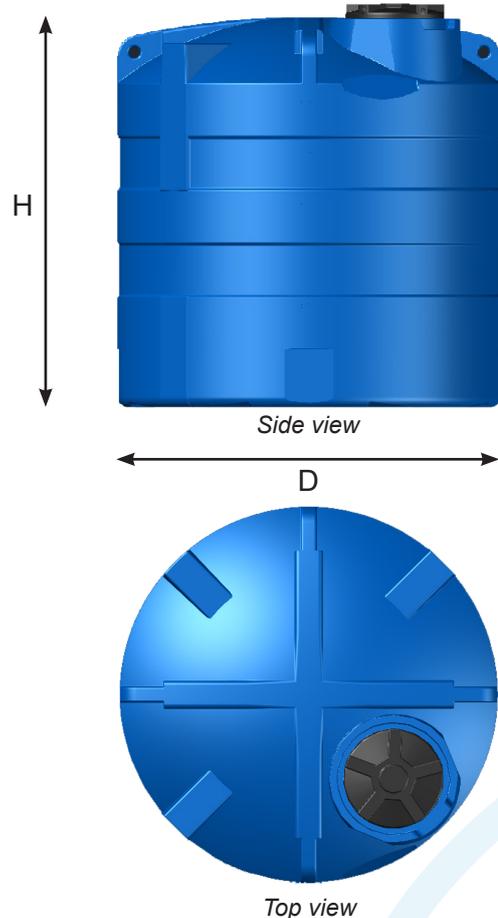

ADH2OC INDUSTRIAL  
 Headquarters  
 3, Rue Kercoz  
 22 220 TRÉGUIER - FRANCE  
 Tel +33 (0)2 96 40 02 50  
 Fax +33 (0)2 22 44 98 48  
[www.adh2oc-industrial.com](http://www.adh2oc-industrial.com)

Workshop  
 Lieudit «La Vallée Drouard»  
 28500 CHÉRISY - FRANCE  
 Tel +33 (0)2 37 50 20 79  
 Fax +33 (0)2 22 44 98 48  
 e-mail : [infos@adh2oc-industrial.com](mailto:infos@adh2oc-industrial.com)