Polyéthylène tank

Cylindrical tank
Food contact - blue or grey

STOCKAGE

POLYETHYLENE TANK

- Rotary moulded tanks of polyéthylène designed for food contact.
- Tanks provided with screw man hole, graduation and PVC rod with high level floats and low level floats, both adjustable.

A 300 to 12 500L range (also available in anthracite in request)

APPLICATIONS

Atmospheric water storage.

Polypropylene tank

TECHNICAL CHARACTERISTICS

Reference	*Volume*	*Weight (kg)*	*D x H (mm)*	*Basic facilities*
CV300	300 L	13.5	D.630x1170	Man hole (ø 300 mm) Low output 1,5" - 2 levels
CV500	500 L	20.5	D.700x1460	Man hole (ø 300 mm) Low output 1,5" - 2 levels
CV750	750 L	25.5	D.800x1680	Man hole (ø 300 mm) Low output 1,5" - 2 levels
CV1000	1 000 L	32.5	D.800x2180	Man hole (ø 300 mm) Low output 1,5" - 2 levels
CV1500	1 500 L	43	D.1060x1920	Man hole (ø 300 mm) Low output 2" - 2 levels
CV2000	2 000 L	48	D.1200x2015	Man hole (ø 400 mm) Low output 2" - 2 levels
CV3000	3 000 L	80	D.1700x1750	Man hole (ø 400 mm) Low output 2" - 2 levels
CV5000	5 000 L	130	D.1900x2100	Man hole (ø 400 mm) Low output DN80 - 2 levels
CV7500	7 500 L	170	D.2150x2400	Man hole (ø 400 mm) Low output DN80 - 2 levels
CV10000	10 000 L	220	D.2400x2600	Man hole (ø 550 mm) Low output DN100 - 2 levels
CV12500	12 000 L	265	D.2400x3100	Man hole (ø 550 mm) Low output DN100 - 2 levels

RECOMMANDED USE

- Atmospheric pressure.
- Temperature ≤ 40°C
- Before the installation, make sure that the concrete ground surface is flat and smooth in order to avoid perforating the tanks.

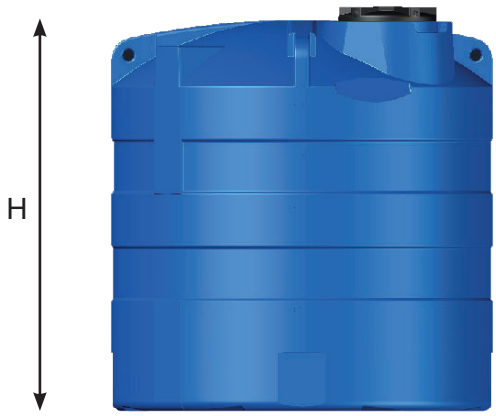

Side view

Top view

ADH2OC INDUSTRIAL

Headquarters
3, Rue Kercoz
22 220 TRÉGUIER - FRANCE
Tel +33 (0)2 96 40 02 50
Fax +33 (0)2 22 44 98 48
www.adh2oc-industrial.com

Workshop
Lieudit «La Vallée Drouard»
28500 CHÉRISY - FRANCE
Tel +33 (0)2 37 50 20 79
Fax +33 (0)2 22 44 98 48
e-mail : infos@adh2oc-industrial.com

CYLINDRICAL_PE_CA_TANKS-2023-EN-D1-V1