

Polyethylene tank


Atmospheric water storage tank
total draining



STORAGE

POLYETHYLENE TANK

- Rotary moulded tanks of natural LLDPE, weld free, designed for food contact.
- Tanks provided with screw on lid, graduation and PVC rod with high level floats and low level floats, both adjustable.

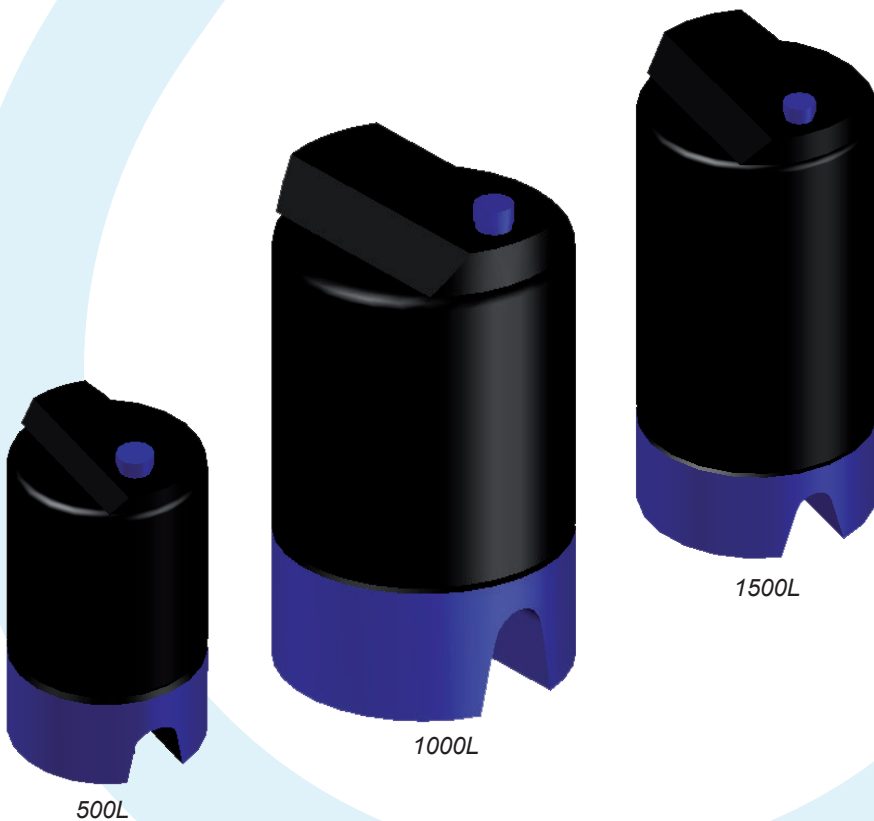

APPLICATIONS

Atmospheric water storage.




Polyethylene tank

TECHNICAL CHARACTERISTICS


TOTAL DRAINING				
Reference	CVT 300	CVT 500	CVT 1000	CVT 1500
Colour	Black	Black	Black	Black
Diameter (mm)	785	785	1100	1110
Height (mm)	1190	1610	1680	2345
Connections :				
Suction	1"	1"	1"	1" ¼
Filling	1"	1"	1"	1" ¼
Overflow	1"	1"	1"	1" ¼
Float levels	2	2	2	2

RECOMMENDED USE

- Atmospheric pressure.
- Temperature $\leq 30^{\circ}\text{C}$
- Stored product density ≤ 1.3

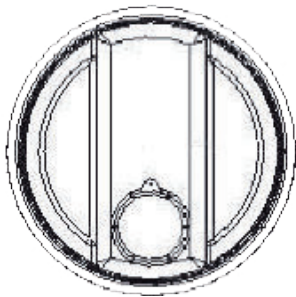

Top view CVT 300 et 500

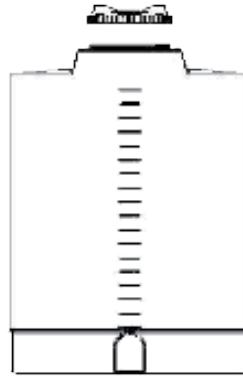

Front view of total draining tank



Total draining tank



ADH2OC INDUSTRIAL
Headquarters
3, Rue Kercoz
22 220 TRÉGUIER - FRANCE
Tel +33 (0)2 96 40 02 50
Fax +33 (0)2 22 44 98 48
www.adh2oc-industrial.com

Workshop
Lieu dit «La Vallée Drouard»
28500 CHÉRISY - FRANCE
Tel +33 (0)2 37 50 20 79
Fax +33 (0)2 22 44 98 48
e-mail : infos@adh2oc-industrial.com