

Solenoid Valve

Assisted solenoid valve NC type STP11



INDUSTRIAL VALVES AND ACCESSORIES

SOLENOID VALVE


ASSISTED SOLENOID VALVE TYPE STP11



Connector



- Normally closed (NC) diaphragm assisted solenoid valve : a minimum differential pressure is always required for the operation of the valve.
- From R 3/8" to R 2".
- Screw-in coil system, vibration resistant, available in 24 VDC, 220-230 VAC (50-60Hz).
- Anti water-hammer and low noise.
- Moulded body with quality surface finish.
- Supplied with a plug-in connector IP65.

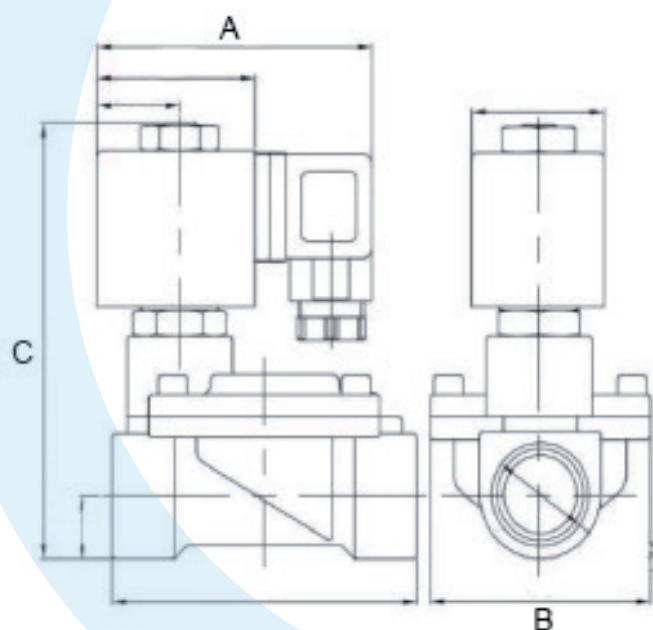

Diameter	A	B	C
G 1/2	75,5	49	103,5
G 3/4	75,5	58,5	112
G 1	75,5	70	120
G 1 1/4	76	88,5	138
G 1 1/2	76	89	139
G 2	76	110,8	156

Assisted solenoid valve NC type STP11

VALVE SELECTION TABLE

VALVES NORMALLY CLOSED (NC)

Diamètre	Orifice mm	KV m ³ /h	Pressure range bars	Weight kg	Dimensions A x B x C	REFERENCES	
						24VDC	220V
G 1/2	15	2,1	0.3-16	0.7	75 x 48 x 106	STP-15-DC24V	STP-15-AC220V
G 3/4	20	5,7	0.3-16	0.9	75 x 58 x 112	STP-20-DC24V	STP-20-AC220V
G 1	25	9,6	0.3-16	1.4	96 x 70 x 131	STP-25-DC24V	STP-25-AC220V
G 1 1/4	32	22	0.3-16	2.8	131 x 94 x 146	STP-32-DC24V	STP-32-AC220V
G 1 1/2	40	27	0.3-16	2.7	131 x 96 x 146	STP-40-DC24V	STP-40-AC220V
G 2	50	35	0.3-16	4	165 x 120 x 167	STP-50-DC24V	STP-50-AC220V

OPERATING DATA

- Température : -10°C to +80°C
- Pressure: 0.20 to 16.0 bar
- Fluid : uncharged water



ADH2OC INDUSTRIAL
Headquarter
3, Rue Kercoz
22 220 TRÉGUIER - FRANCE
Tel +33 (0)2 96 40 02 50
Fax +33 (0)2 22 44 98 48
www.adh2oc-industrial.com

Workshops
Lieudit «La Vallée Douard»
28500 CHÉRISY - FRANCE
Tel +33 (0)2 37 50 20 79
Fax +33 (0)2 22 44 98 48
e-mail : infos@adh2oc-industrial.com