

# Multi-cartridges filter


Stainless steel multi-cartridges filter housing BN1



FILTRATION

## STAINLESS STEEL MULTI-CARTRIDGE FILTER

- Stainless steel.
- For extruded polypropylene DOE cartridges and activated carbon EP.
- Clamp closure that ensures a secure seal and easy cartridge replacement.
- Number of cartridges per filter: 5 (20, 30 ou 40") or 7 (40").
- Complies with the European Directive 97/23/EC for pressure equipment.

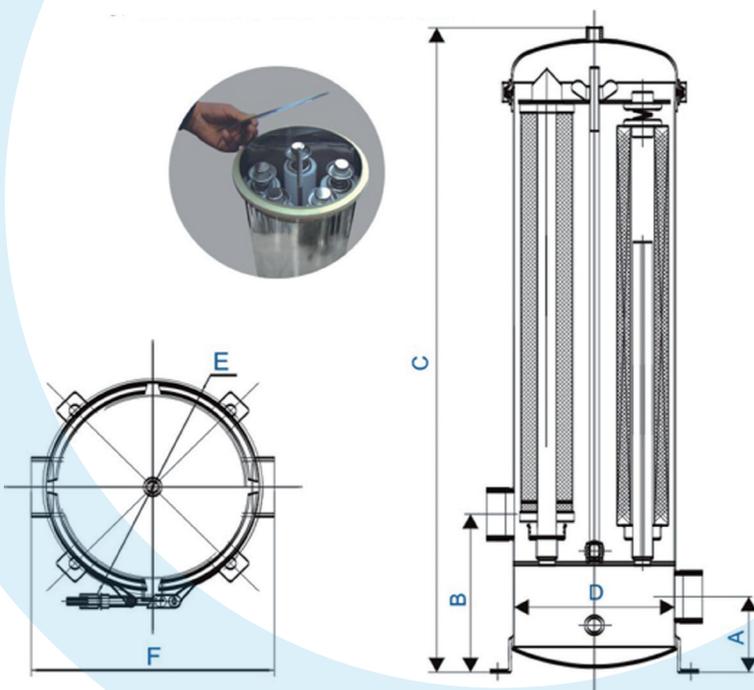

## APPLICATIONS

All filtration applications especially the pre-filtration of membrane equipment (in reverse osmosis)

# Multi-cartridges filter

## RANGE

References	Number of cartridges	Cartridges length	Weight Kg	Capacity Liters
BN1-W5L2	5	20"	12,5 kg	24L
BN1-W5L3	5	30"	15,8 kg	32L
BN1-W5L4	5	40"	18,7 kg	40L
BN1-W7L4	7	40"	30,5 kg	62L

## OVERALL DIMENSIONS in mm

	BN1-W5L2	BN1-W5L3	BN1-W5L4	BN1-W7L4
A	120	120	120	120
B	220	220	220	220
C	860	1110	1360	1370
D	Ø 200	Ø 200	Ø 200	Ø 250
E	Ø 248	Ø 248	Ø 248	Ø 310
F	260	260	260	310
Input / Output	1 1/2"	2"	2"	DN65
Purge and drain	1/4" - 1/2"	1/4" - 1/2"	1/4" - 1/2"	1/2"

## CARACTERISTIQUES TECHNIQUES

Working pressure : 7,00 bars

Maximum temperature 90°C

304 stainless steel construction

EPDM seal



ADH2OC INDUSTRIAL  
Headquarters  
3, Rue Kercoz  
22 220 TRÉGUIER - FRANCE  
Tel +33 (0)2 96 40 02 50  
Fax +33 (0)2 22 44 98 48  
www.adh2oc-industrial.com

Workshop  
Lieudit «La Vallée Douard»  
28500 CHÉRISY - FRANCE  
Tel +33 (0)2 37 50 20 79  
Fax +33 (0)2 22 44 98 48  
e-mail : infos@adh2oc-industrial.com