

# Polyethylene tank

Atmospheric water storage tank  
flat bottom



STORAGE

POLYETHYLENE TANK

- Rotary moulded tanks of natural LLDPE, weld free, designed for food contact.
- Tanks provided with screw on lid, graduation and PVC rod with high level floats and low level floats, both adjustable.



*Flat bottom tank 1475L*

## APPLICATIONS

Atmospheric water storage.



# Polyethylene tank


## TECHNICAL CHARACTERISTICS

### FLAT BOTTOM

Reference	CVC 5	CVC 10	CVC 15	CVC 20	CVC 31	CVC50	CVC60	CVC80
Capacity (l)	565	1000	1475	2050	3050	5050	6350	8200
Colour	Noir	Noir	Noir	Noir	Noir	Noir	Noir	Noir
Diameter (mm)	840	990	1100	1210	1380	1580	2000	2100
Height (mm)	1265	1470	1720	1990	2550	2820	2415	3045
Connections :								
Suction	1"	1"	1" ½	1" ½	2"	2"	DN80	DN80
Filling	1"	1"	1" ¼	1" ¼	1" ½	1" ½	2"	2"
Overflow	1"	1"	1" ¼	1" ½	2"	2"	DN80	DN80
Float levels	2	2	2	2	2	2	2	2

## RECOMMENDED USE

- Atmospheric pressure.
- Temperature  $\leq 30^{\circ}\text{C}$
- Stored product density  $\leq 1.3$

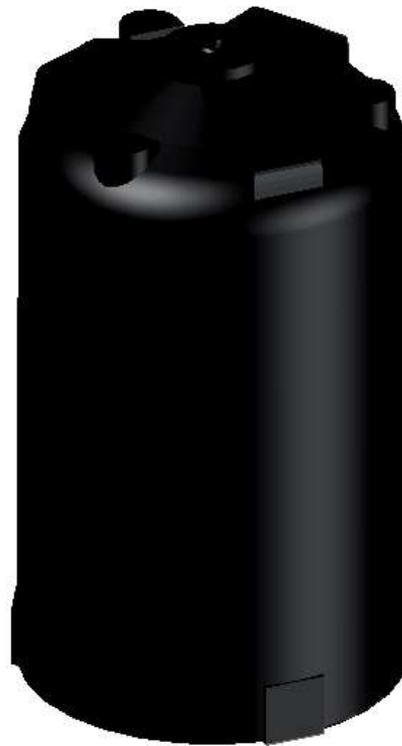

Flat bottom tank 5000L



ADH2OC INDUSTRIAL  
Headquarters  
3, Rue Kercoz  
22 220 TRÉGUIER - FRANCE  
Tel +33 (0)2 96 40 02 50  
Fax +33 (0)2 22 44 98 48  
www.adh2oc-industrial.com

Workshop  
Lieu dit «La Vallée Drouard»  
28500 CHÉRISY - FRANCE  
Tel +33 (0)2 37 50 20 79  
Fax +33 (0)2 22 44 98 48  
e-mail : infos@adh2oc-industrial.com